


EVASAFE FIRE SYSTEMS

EPL13340 ZONAL AUXILIARY SERVICES UNIT

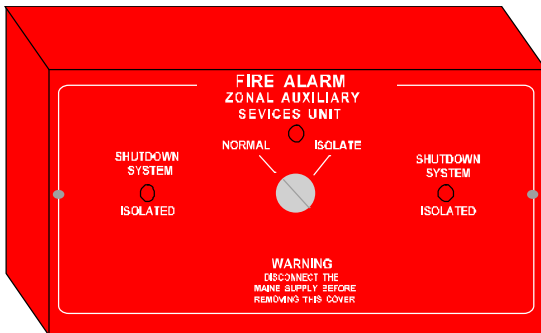

INTRODUCTION

This unit is intended to be connected between a control panel and plant, such as ventilation, fire dampers etc., that need to be controlled on a zone by zone basis in the event of fire.

The unit allows isolation of such items during testing.

When in the isolated position, twin LED indicators flash alternately, and a synchronous audible indication is given.

The enabling key can only be removed in the normal position.

FEATURES

- 8 or 16 Zonal Relays
- Mains rated contacts.
- Isolated status warning.

MECHANICAL

- **Housing:** Steel Wall mounting Enclosure
- Access: by removable front cover
- Cover retained by security screws
- Colour: Signal Red (standard)
- Weight 2 Kg (8 zone), 4 Kg (16 zone)
- **DIMENSIONS** (in mm)

8 Zone Unit: 320 Wide x 160 Top to Bottom x 85 Front to Back

16 Zone unit:- 440 Wide x 325 Top to Bottom x 110 Front to Back,

ELECTRICAL

- Supply Voltage 24v.d.c.
- Supply Current 20 mA quiescent + 6mA per zone in alarm.
- Control Inputs 1mA 12-24v.d.c. (To suit EPL2130 repeater outputs)
- 8 or 16 Zone Relays, 2 pole c/o
- Contact rating 250v.a.c. 5A
- Keyswitch controlled Isolation of all circuits for Test purposes
- Audible and visual warning of isolation.

EVASAFE PRODUCTS LIMITED, FARREN COURT, COWFOLD, HORSHAM,
WEST SUSSEX, RH13 8BP, UK

TEL: 01403 864 676, FAX: 01403 864 873, Email: info@evasafe.co.uk